



Driller Red Grease Extreme Pressure Lithium Complex Grease, 14 Wt Oz

No. SL3640 | Item# 1007959 | Case# 1007958

Product Description Driller Red Grease is a NLGI #2 Red Grease which offers

superior protection to lubricate a wide variety of severe

duty drilling, industrial, mining and construction

equipment. Timken load of 80 lbs.

Applications Drilling and Mining applications, backing plates, ball joints,

chassis points, construction ball & roller bearings, idler bearings, industrial applications, pillow block bearings, sprocket bearings, U-joints, water pumps, wheel bearings

Unit Package Description 14 Ounce Cartridge

Brand CRC

Generic Description 1 Extreme Pressure Lithium Complex Grease

Net Fill 14 Wt Oz

UPC Code 072213364002

Unit Dimensions 9.31H x 2.13W x 2.13D in

Units Per Case 10

Case Dimensions 9.5H x 4.5W x 11.38D in

Cases Per Pallet 150
Case Weight 10 lbs

I 2 of 5 Code 30072213364003

Appearance Red, Smooth, Tacky

Base Type Lithium Complex

Flash point (F) 302°F
Flash point (C) 150°C
Flammability Class - CPSC None
Spec Gravity Concentrate 0.93
NLGI Grade 2

Timken OK Load Lbs. 80 Lbs
Plastic Safe Yes


Dielectric Strength Not Determined

Last revised: 8/19/2019

Page 1 of 2





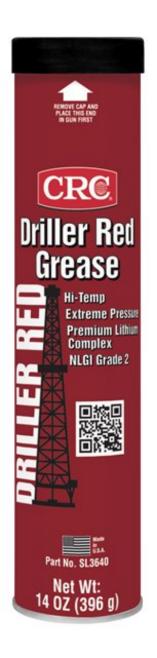

Working Temp (F)

Working Temp (C)

4 Ball EP

4 Ball Wear

Drop Point

-10 to 400°F

-23 to 204°C

315 Kgf

0.45

550°F

Leakage 2.0

Low Temp Torque Not Determined

Oil Separation 1.0

Oxidation Stability

Pour Point (F)

Pour Point (C)

Water Washout

Vorked Penetration

Not Determined

Not Determined

2.5 at 175°F

265 to 295

Propellant None

DOT Proper Shipping Name Not Regulated VOC % (Consumer Product Not Determined

def)

VOC g/L (Consumer Not Determined

Product def)

VOC lbs/gal (Consumer Not Determined

Prod def)

VOC Category Not Regulated

Removal (How To) Remove with a degreaser.

Last revised: 8/19/2019

Page 2 of 2

