

Dry PTFE Lube, 10 Wt Oz

No. 03044 | Item# 1003302 | Case# 1003301

Product Description Contains PTFE, the advanced Dry Film lubricant

technology from DuPont®. Penetrates and bonds to most surfaces. Prevents sticking, reducing friction and wear and is highly resistant to oil, dust and dirt build-up. NSF H2

Registered.

Applications Hinges, locks, catches, pulleys, conveyors, machine parts,

chutes & slides, coin mechanisms, window guides,

drawers, rollers, control buttons, switches, electrical wires

& harnesses.

Unit Package Description 16 Ounce Aerosol

Brand CRC

Generic Description 1 Dry Film Lubricant

Net Fill 10 Wt Oz

UPC Code 078254030449

Unit Dimensions 7.75H x 2.63W x 2.63D in

Units Per Case 12

Case Dimensions 8.1H x 8.3W x 11.1D in

Cases Per Pallet 133
Case Weight 11 lbs

I 2 of 5 Code 30078254030440

Appearance Hazy White Suspension in Liquid

Base Type PTFE Flash point (F) $<20^{\circ}F$ Flash point (C) $<-7^{\circ}C$

Flammability Class - CPSC Flammable

Spec Gravity Concentrate 0.73 Plastic Safe Yes

Film Type Micro-Thin and Dry
Film Thickness 0.05 to 0.1 Mils


Evaporation Rate Fast

Last revised: 9/5/2019

Page 1 of 2





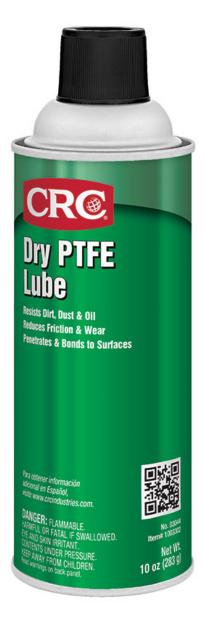

Working Temp (F) -40 to 450°F
Working Temp (C) -40 to 232.2°C
Propellant Hydrocarbon

NSF Category Code H2

NSF Number 121621

Aerosol Flammability Level III

DOT Proper Shipping Name Aerosols, Flammable, Limited Quantity

715.4

5.96

VOC % (Consumer Product 98

def)

VOC g/L (Consumer

Product def)

VOC lbs/gal (Consumer

Prod def)

VOC Category Dry Film Lubricant

Removal (How To) Remove with IPA or hexane if wet; hard rubbing when

dry.

Last revised: 9/5/2019

Page 2 of 2

